

# Littlite®

Gooseneck Lamps & Accessories



Use Littlites  
anywhere  
you need  
a little  
light!

# Littlite®

THE FLEXIBLE  
GOOSENECK LAMP  
WITH **VERSATILITY**  
AND **STYLE.**

# LAMPSETS



	High Intensity	Low Intensity
Detachable Gooseneck	L-4	L-1
Permanently Attached Gooseneck	L-3	L-2



With their sleek, unobtrusive look, Littlites complement any decor. They are ideally suited to any task involving accurate, close or detail work.

## L-SERIES LAMPSETS

Littlite® Lampsets come complete and ready for easy surface mounting. All sets are available in 6, 12 or 18 inch lengths and include bulb, chassis and fully adjustable dimmer. Each set also includes a 6 foot cord, a snap mount set (SM) for easy removable mounting and screws for permanent mounting. 120 or 240 volt versions include wall plug-in transformers. 12 volt versions can be powered from any 12 volt AC or DC supply.

**DETACHABLE BNC MODELS** feature a detachable gooseneck with a BNC connector at the chassis and storage clips for the gooseneck. The lamp is available with your choice of a 2.4 watt or 5 watt bulb.

**PERMANENT MOUNT MODELS** feature the gooseneck permanently attached at the chassis. Available with either a 2.4 watt or 5 watt bulb.

## BULB OPTIONS

### HIGH INTENSITY L-SERIES LAMPS

The 5 watt Tungsten-Halogen bulb, with stylish finned hood, produces a crisp bright, long lasting white light which is concentrated in a tightly controlled pattern, easily aimed exactly where you need it.

### LOW INTENSITY L-SERIES LAMPS

The low intensity 2.4 watt bulb with extra slim hood, produces enough light for many tasks in dimly lit areas. With its low power light source, this Littlite® is best suited for applications where a low level of light is desired.



# ACCESSORIES

Numerous accessories are available to complete your Littlite® package: adjustable clips to attach Littlites to your music stand; weighted bases that allow your Littlite® to become a movable, free standing light source; a magnetic base that lets you mount your light to machinery or tools; and a cigarette lighter plug to power the Littlite® inside your vehicle.

## WALL TRANSFORMERS & WIRING ACCESSORIES

- WXF WALL TRANSFORMER  
Plugs into a 120 VAC outlet and supplies 12 volts AC at up to 500mA. Will power one 5 watt or two 2.4 watt Littlites. (5 watts maximum) Easily connects with screw terminals. UL and CSA approved.
- WXF-10 WALL TRANSFORMER  
120 VAC to 12 VAC 1.6 amp transformer powers up to 4 High Intensity Littlites. UL and CSA approved.
- EXF EURO-PLUG POWER TRANSFORMER  
240 volt (5 watts max)  
TUV and CE approved.
- EAD EURO-PLUG ADAPTER  
To be used with EXF and standard Littlites.
- CP CIGARETTE LIGHTER PLUG  
Used to power the Littlite® from a cigarette lighter outlet.
- LV LOW VOLTAGE HOOKUP KIT  
Includes parts and instructions for wiring Littlites into a 12 volt system. Includes fuse and holder, connectors and line taps.

## REPLACEMENT BULBS

- Q5 BAYONET BASE BULB FOR HIGH INTENSITY LITTLITE®  
Bright "white" 12 volt, 380mA (AC or DC) bayonet base, 5 watt, tungsten-halogen bulb.
- 1815 BAYONET BASE BULB FOR LOW INTENSITY LITTLITE®  
12 volt, 230mA 2.4 watt incandescent bulb.
- HIC HIGH INTENSITY CONVERSION SET  
Includes a High Intensity hood and Q5 bulb to convert low intensity Littlites to High Intensity. Includes two "O" rings.

## REPLACEMENT HOODS

- HH HIGH HOOD  
Includes two "O" rings.
- LH LOW HOOD  
Includes two "O" rings.
- LX X SERIES HOOD  
Includes two "O" rings.

## MOUNTING ACCESSORIES

- WB WEIGHTED BASE  
A stylish metal base that is screwed onto the bottom of the Littlite® chassis. Converts L models into free standing lights.
- SM SNAP MOUNT  
A pair of self-adhesive backed, snap-together pads used whenever you need quick, easy placement and removal of an L series lamp.
- HTC HIGH TENSION CLAMP  
The HTC clamp can be used to clamp a Littlite® lampset to a pipe, bar, table or panel edge. The clamp can be mounted to the lamp with screws or with the snap mount (SM).
- CL ADJUSTABLE CLIP  
Adjusts to clip on edges from 1/16" to 7/8" thick. Included is all necessary hardware.
- MB MAGNETIC BASE  
An extra strong magnetic plate that mounts via an adhesive strip to the bottom of the L series chassis. This accessory provides portable mounting for music stands, mechanics task lamps or as a vehicle map light.
- DM DIMMER RHEOSTAT  
Varies the intensity of P, G, or X series gooseneck lamps. Will dim four low intensity or one high intensity lamp. Mounts in a 13/32" hole in material 1/8" thick or less, or on an MP. Quiet, noise free operation. With off position.
- MP MOUNTING PLATE  
A 1-1/4" square metal plate with a 3/8" hole in its center. To mount PS, DM or P series lamps in thick surfaces.
- PS PANEL SOCKET  
Mates with the G series gooseneck BNC connector. Mounts in a 13/32" hole in material 1/8" or less thick, or in an MP. Includes ground lug, lock washer and nut. Not electrically isolated.
- LK REPLACEMENT KNOB  
Replacement knob for Littlite® dimmer.



# ACCESSORIES

CL Adjustable Clip

DM Dimmer Rheostat

## MISCELLANEOUS ACCESSORIES

- L-1** REPLACEMENT CHASSIS  
Converts a G series BNC connector goose-neck lamp into a complete lampset. Includes 6-foot cord and dimmer rheostat.
- SC** STORAGE CLIPS FOR DETACHABLE SERIES LAMPS  
One pair, used to secure Littlites for transit or storage. Includes mounting screws.
- XC** STORAGE CLIP FOR "X" & AUTOMOTIVE SERIES LAMPS  
Individual, attaches with adhesive back.
- CF** COLOR FILTER  
A set of three molded color filters which easily slide from working position in the hood to storage position. Ideal for night vision in vehicles, chart lamps, in laboratories or as a mood lamp. Package includes red, blue and clear.
- NVF** NIGHT VISION FILTERS  
Packaged in a set of three filters, specifically designed for the high hood. \*Specify red, blue or clear.
- O-KIT** SPARE "O" RINGS  
Packaged in quantities of 12 for standard Littlites.
- O-KIT-X** SPARE "O" RINGS  
Packaged in quantities of 12 for X series Littlites.

## SPARE BULBS



## MISCELLANEOUS ACCESSORIES



MP  
Mounting  
Plate

PS Panel Socket

MB Magnetic Base

HTC  
High  
Tension  
Clamp

SM Snap Mount

WB Weighted Base

CP Cigarette Plug

WXF Wall Transformer

EXF  
Euro-Plug  
Power  
Transformer

G Series with BNC Connector ▶

P Series for permanent installation ▶

X Series with XLR Connector ▶

XR Series with Right Angle XLR Connector ▶

## INDIVIDUAL GOOSENECK LAMPS

Littlite® G, P and X series gooseneck lamps can be built into any device that requires lighting. Available in 6, 12, and 18 inch lengths, in low intensity (2.4W), or high intensity (5W) versions.

### P SERIES GOOSENECKS

have 3/8" diameter, (3/8-32 UNEF) threaded end with one wire grounded lamp circuit and ground lug and nut. Use where a permanently mounted gooseneck is desired. Mounts in a 13/32" hole in material up to 1/8" thick. Add a mounting plate (MP) for mounting in thicker material.

### G SERIES GOOSENECKS

have BNC connectors and are useful in applications requiring removal for transit or storage. They mate with panel sockets (PS) supplied on or added to equipment.

### X SERIES GOOSENECKS

have 3 or 4 pin male "XLR type" connectors with isolated lamp circuit. (Also available in "XR" right angle connector type.) Useful where a detachable, non-swiveling connection is desired. Ideal for vertical or sloped work surfaces.

## RAKLITES™

The LITTLITE® HIGH INTENSITY RAKLITE comes complete with your choice of one or two 12" goosenecks, with bright 5 watt bulbs, dimmer rheostat, 6' cord and transformer. When mounted at the top your rack, the Littlite® provides illumination for an entire rack of lighting or audio equipment. Littlite's flexibility allows you to adjust illumination for patching or general rack service. The gooseneck light is recessed into a sturdy black metal E.I.A. standard 19" wide x 1.75" high rack panel. It is available in 12V, 110V, and 240 volt versions.



▶ Raklite RLX

The LITTLITE® RLX™ RAKLITE is a sleek black single space rack panel (1.75") equipped with two 3-pin XLR connectors ready to receive one or two X or XR detachable Littlites. The convenient dimmer allows you to adjust the brightness of the Littlite® to the desired intensity. The flexible gooseneck allows you to direct the light exactly as needed: at turntables, CD changers, audio or lighting racks. Available in 12V, 110V and 240 volt versions. (Goosenecks not included.)



▶ Raklite RL-10-D

## AUTOMOTIVE LAMPSETS

Each automotive set comes with a 6, 12 or 18 inch permanently mounted gooseneck, 5 watt bulb, full range dimmer, removable color filter, mounting hardware and storage clip.

The L-5 SERIES gooseneck exits out the end of the chassis so it lays flat for storage. 24" red and black leads extend out the bottom of the chassis for easy, permanent mounting on any flat surface.

The L-9 SERIES gooseneck exits out the top of the chassis. 24" red and black leads extend out the bottom of the chassis for easy, permanent mounting on any flat surface.

The L-6 SERIES is portable. The gooseneck is permanently attached at one end of the chassis. The two foot cord with a cigarette plug exits from the opposite end.



▶ L-5 Automotive Lamp



▶ L-9 Automotive Lamp



▶ L-6 Automotive Lamp



# TECHNICAL INFORMATION

## INSTALLATION

Building of Littlites into any equipment should be done by a qualified technician. We are happy to provide instructions and technical assistance, but technical ability is a must for any person modifying equipment. The technician is responsible for a safe and reliable installation.

## POLARITY

Please note that with the exception of the "X" series XLR connector lamp, the lamp circuit is connected to the body of the gooseneck (grounded). High voltage isolation is not guaranteed. Proper polarity must be observed.

## CONSTRUCTION

All Littlites and accessories are designed and constructed to meet the most demanding needs. Most of the parts are metal, finished in durable black baked enamel.

## Q5 HALOGEN BULB


Operates on 12 volts AC or DC, 420mA maximum (5 watts), with a rated life of 240 hours. The lamp brightly illuminates an area 20 inches in diameter at a distance of 12 inches from the lamp, to a level of 25 footcandles.

## 1815 LOW INTENSITY BULB


This bulb is rated at 12 volts AC or DC, 230mA (2.4 watts) with a rated life of 1000 hours. The 1815 Littlite® bulb illuminates a 20 inch diameter circle 12 inches away to a level of approximately 5 footcandles.

## LIFETIME LIMITED WARRANTY

Littlite, LLC warrants to the original purchaser that Littlite® Gooseneck Lamps and Accessories are free from defects of material or workmanship under normal use and service, for the life of the product. Modification or tampering which interferes with the normal operation of the product, abuse, misuse, or use in a manner not intended by the manufacturer invalidates the WARRANTY. The WARRANTY does not apply to light bulbs. As Littlite has no control over the installation and use of this product, we make no WARRANTY beyond the normal functioning of our lamps when properly installed and serviced. Our products are not to be used where failure to operate could cause consequential damage or hardship, and we accept no liability for any damage consequential to our lamp's failure to operate. Under no circumstances shall Littlite be liable in contract, in tort, under any WARRANTY in negligence, or otherwise, for any special, indirect, or consequential damages. Littlite does not authorize any person to create for it any other obligation or liability beyond that stated herein.

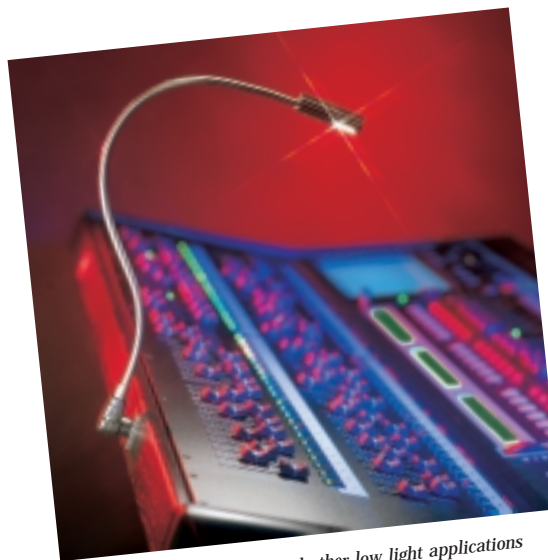

▲ ...On lighting equipment and other low light applications

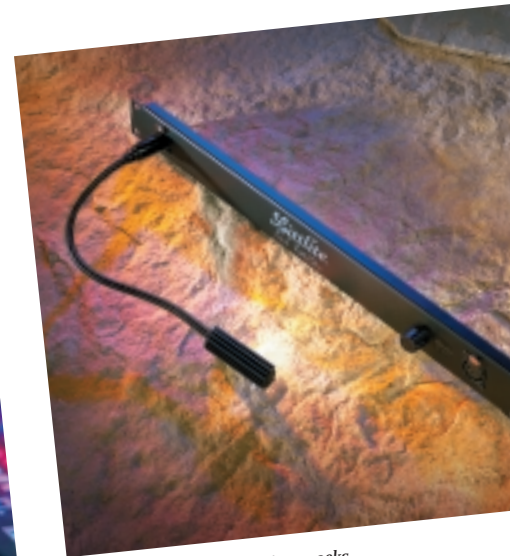

▲ ...In data cabinets or effects racks



▲ ...For DJs and audiophiles

